





## INDUSTRIAL FINISHING

We recommend to seteam first, then dry cleam with any solvent depending of the result you want to obtain. After this steam the garment without pressuring the knitted panel.

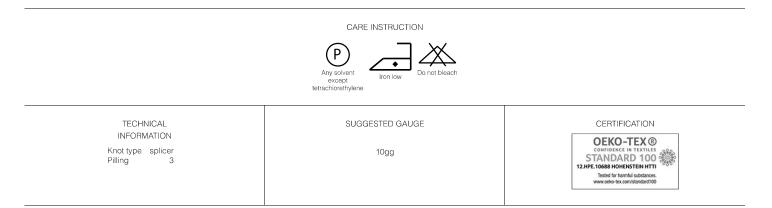

## INDUSTRIAL FINISHING

We recommend washing at 35° in gentle cycle during 3 minutes using a softener that does not exceed 4% of the weight of the material considering the finishing expected. Centrifuge for 2 minutes. Dry. Use manual iron.



COLOR FASTNESS (AVERAGE VALUES)				
	Dry rubbing	Wet rubbing	Wash fastness	
.ight ∕ledium	4/5 4	4/5 3	4/5 4	
Dark	3	2/3	3	



COLECCIÓNOTOÑO INVIERNO 23/24 / PURE / Baby Linen

PURE

TECHNICAL	KETTLE SIZE (Kg.)	SUGGESTED GAUGE
Dyeing method Hanks Knot type splicer Pilling 3	30 40 80 200	10gg

NOTES:

- Bleeding might occur in designs with white stripes and intense colours. Please consult us for further details.
- Hangtags are available free of cost, 3 pieces per 1kg of yarn
- All natural colours qualify for Oeko-Tex standard class I.
- Most Dyed colours qualify for Oeko-Tex standard class II, depending on colour. Some dark colours do not qualify for Oeko Tex.
- Traceability is an inhouse programme of Grupo Inca and own certificate is supplied. Request for traceability must be given at time of order.