


SEASONLESS 26 / LEGACY / Ampi / Pisku



## INDUSTRIAL FINISHING

We recommend washing at 35° in gentle cycle during 3 minutes using a softener that does not exceed 4% of the weight of the material considerig the finishing expected. Centrifuge for 2 minutes. Dry. Use manual iron, If a more pronounced pile is required, washing time or washing cycle revolutions should be increased, but the bath temperature must be reduced to avoid the felting effect.

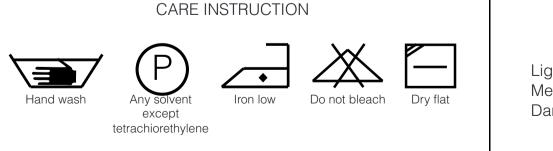

COLOR FASTNESS (AVERAGE VALUES)

	Dry rubbing	Wet rubbing	Wash fastness
Light	4	3/4	4
Medium	3/4	2/3	3/4
Dark	3	2/3	3

INTIFIL SA Sonnenrainweg 8 - 8834 Schindellegi - Switzerland | Phone: +41 79 335 25 00 | Email: info@intifil.com www.intifil.com



\_\_\_\_\_

SEASONLESS 26 / LEGACY / Ampi / Pisku

TECHNICAL INFORMATION	KETTLE SIZE (Kg.)	SUGGESTED GAUGE
Dyeing method hanks Knot type knot Pilling 3	58 80 115 170	NM 1/5 5gg NM 1/3.5 3gg

NOTES:

- Might occur bleeding in design with white stripes and intense colors.
- Consult our sales team about dyeing process that decrease bleeding risk on intense colors
- Minimum for dark colors subject to revision.
- For solid dark shades, the fastness value could be lower than the one mentioned above. For more information contact your sales executive.

INTIFIL SA Sonnenrainweg 8 - 8834 Schindellegi - Switzerland | Phone: +41 79 335 25 00 | Email: info@intifil.com www.intifil.com